

Digital Weighing Indicator

XK3190 - A15E



Accurate Weighing

Ultra clear screen

Quality assurance


Clear Reading

Basic Features

- High precision A/D conversion with max. external counts 30000 and min. counting precision 1/10000
- Able to set up zero-tracking range, zero(auto/manual) range and zero speed
- Accumulation result display
- Selection of price-computing function or counting function
- XK3190-A15 (LCD display) with selectable backlight mode
- XK3190-A15E(LED display) with selectable power-saving mode
- AC/DC power supply, with built-in rechargeable battery
- Indicating for battery volume or status
- Alarm for low battery and auto power off at low battery
- Optional of RS232 interface with selectable baud rate
- High-Low alarm (on/off output optional)

Rich external interface

Connect the sensor power supply socket, etc

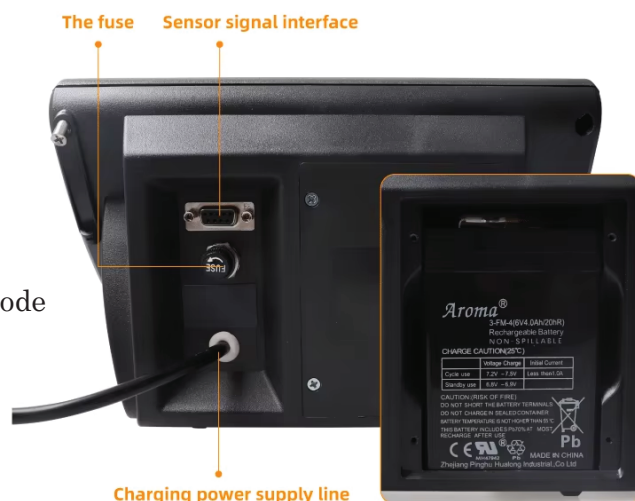

Technical Features

Loadcell excitation	DC 5V
Max. no of loadcells	6
Loadcell connection mode	4 wire
Verified Counts	3000
Max. external counts	30000
Max. internal resolution	600000
Division	1/2/5/10/20/50/100
Display	LED
Display range	-999900 , 999900(d=100)
Optional	RS232
Power supply	AC 187-242V, DC built-in rechargeable 6V/4Ah battery